

ABRASIVE VERTICAL RICE WHITENERS SERIES NML




NML 40



EPSEL RICE CORPORATION
PO BOX 771724 HOUSTON, TX 77215-1724
PH: (281) 331-5214 FAX: (281) 331-3889
E-mail: info@epselrice.com

Description

- ❑ This machine has been designed to equally distribute the abrasive pressure throughout each polishing chamber. The rice stream moves downwards.
- ❑ Strong air ventilation is applied through the shaft, and throughout an efficient bran discharge system. Rice leaves this machine with far less content of bran, allowing the next friction step to perform more efficiently.
- ❑ 120° screen design allows screens to be replaced very easily. Hardened stainless steel indented/louvered screens.
- ❑ Built-in AMP meter allows the operator to adjust weights and steel rice brakes (rice speed reducers)
- ❑ Guaranteed from-stock spare parts delivery. One year limited warranty on parts and labor.

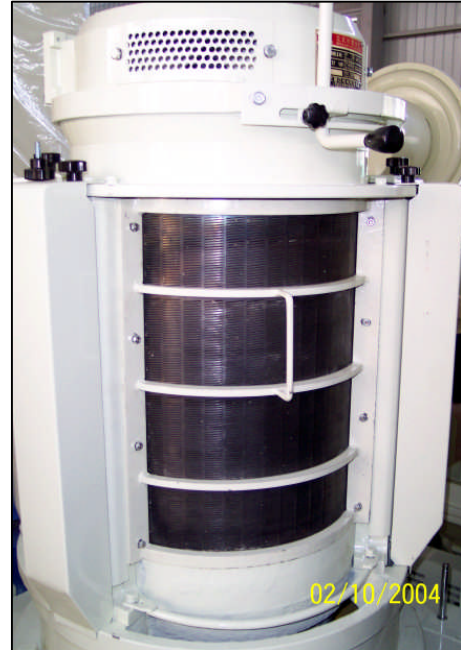

Technical Details

Model	NML 40
Capacity T/H	Up to 5.5 T/Hr (Up to 12,100 Lbs/Hr)
Power	37 KW to 45 KW [45 to 60 HP]
Dimensions (Feet/Inches.)	1570 x 1300 x 1980 mm [5'2" x 4'3" x 6'6"]
Aspiration Air Volume	2500 Cubic Meters / Hr 41 Cubic Meters / Minute
Aspiration Static Pressure (mm H ₂ O)	-100 to - 150

Epsel Rice Corp. reserves its right to change specifications without notice.

WWW.EPSELRICE.COM